

HYUNDAI

OSD Color Dome Camera


HCDC-2031OSD



Features

- 1/3" Sony Super Had CCD
- High Image Quality of 530TV-Lines
- OSD Menu
- Day & Night Camera
- Digital Signal Processor (DSP) allows better picture quality
- Digital Noise Reduction
- Backlight Compensation

Dimension

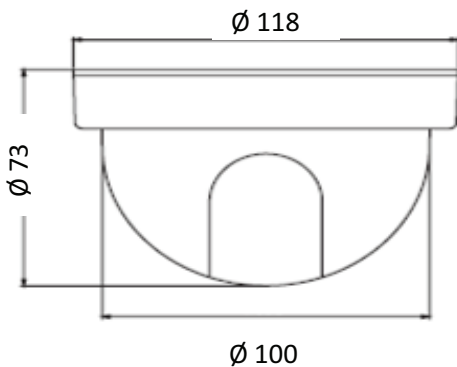

Specifications

| MODEL | HCDC-2031OSD |
|-----------------------|--|
| Image Sensor | 1/3" Color Sony Super Had CCD |
| Video Format | 60Hz for NTSC, 50Hz for PAL |
| Total Pixels | 537(H) X 505(V) for NTSC, 537 X 597(V) for PAL |
| S/N ratio | 50dB (AGC Off) |
| Horizontal Resolution | 530 TV Line |
| Shutter Speed | 1/60s~1/100,000s for NTSC, 1/50s~100,000s for PAL |
| Video Signal | BNC 1.0V p-p 75Ohms |
| Lens | Fixed Board Lens |
| Min. Illumination | 0.1 Lux |
| Operating Temperature | From -10°C ~ 50°C |
| Supplied Voltage | DC 8 ~ 14V |
| Power Consumption | Max. 1.4W |
| Weight | 300g (Approximately) |
| OSD Menu | |
| CAMERA ID | ON / OFF |
| LENS | MANUAL / VIDEO / DC |
| SHUTTER | AUTO / FLK / FIXED / MANUAL |
| WHITE BAL. | ATW / AWB / FIXED / MANUAL |
| FUNCTION | BLC / AGC / DAY NIGHT / PRIVACY / MIRROR / GAMMA/MOTION |
| ADJUST | CONTRAST / SHARPNESS / CB_GAIN / CR_GAIN |
| LANGUAGE | ENGLISH / KOREAN / CHINESE 1 / CHINESE 2 / JAPANESE |
| RESET | |
| EXIT | |